

Western Electric

232B Vacuum Tube



Classification—Filamentary water-cooled triode

May be used as an audio-frequency amplifier or as a radio-frequency oscillator, amplifier or modulator.

Dimensions—Dimensions and outline diagrams are shown in Figure 1. The overall dimensions are:

| | |
|-----------------------------|---------------------|
| Maximum overall length..... | $21\frac{15}{16}$ " |
| Maximum diameter..... | $4\frac{1}{8}$ " |

Mounting—W.E. 132A, 133A or similar socket. The tube should be mounted only in a vertical position with the anode end down.

Filament—Tungsten

| | |
|----------------------------------|------------------|
| Filament voltage..... | 20.0 volts, a.c. |
| Nominal filament current..... | 60.0 amperes |
| Average thermionic emission..... | 10.0 amperes |

Average Direct Interelectrode Capacitances

| | |
|------------------------|-----------------------|
| Plate to grid..... | 29.1 $\mu\mu\text{f}$ |
| Grid to filament..... | 19.9 $\mu\mu\text{f}$ |
| Plate to filament..... | 0.6 $\mu\mu\text{f}$ |

Characteristics—Performance data given below are based upon a typical set of conditions. Variations can be expected with different circuits and tubes.

Figures 2 and 3 give the static characteristics of a typical tube plotted against grid and plate voltages.

Average Characteristics at plate voltage of 15,000 and plate current of 1.35 amperes.

| | |
|-------------------------------------|----------------|
| Amplification factor..... | 40 |
| Plate resistance..... | 6150 ohms |
| Grid to plate transconductance..... | 6500 micromhos |

Operation**Maximum Ratings**

| | |
|--|--------------|
| Max. direct plate voltage..... | 20,000 volts |
| Max. direct plate current..... | 3.0 amperes |
| Max. plate dissipation..... | 25,000 watts |
| Max. grid dissipation..... | 400 watts |
| Max. r-f grid current..... | 40 amperes |
| Max. frequency for the above ratings..... | 3 megacycles |
| Max. plate voltage for upper frequency limit of 12 Mc..... | 10,000 volts |
| Max. plate voltage for frequencies between 3 and 12 Mc in proportion | |

Class B Radio-Frequency Amplifier

| | | |
|--|--------|--------------|
| Direct plate voltage..... | 17,500 | 12,500 volts |
| Direct plate current for carrier conditions..... | 1.5 | 2.2 amperes |
| Grid bias..... | -500 | -350 volts |
| Approximate carrier watts for use with | | |
| 100% modulation..... | 9000 | 9000 watts |

Class C Radio-Frequency Oscillator or Power Amplifier—Unmodulated

| | | |
|---------------------------|--------------|--------------------|
| Direct plate voltage..... | 15,000 | 10,000 volts |
| Direct plate current..... | 2.5 | 2.6 amperes |
| Grid bias..... | -600 to -800 | -450 to -600 volts |
| Nominal power output..... | 25,000 | 17,500 watts |
| Plate dissipation..... | 12,500 | 8500 watts |

Class C Radio-Frequency Amplifier—Plate Modulated

| | | |
|-----------------------------------|--------|------------------|
| Direct plate voltage..... | 12,500 | 7500 volts |
| Direct plate current..... | 1.50 | 1.50 amperes |
| Grid bias..... | -700 | -450 volts |
| Max. direct grid current..... | 250 | 250 milliamperes |
| Nominal carrier power output..... | 12,500 | 7500 watts |

Operating Precautions

Mechanical—Figure 1 shows the overall dimensions and basing arrangement for the tube.

The tubes should not be subjected to mechanical shock or excessive vibration. Mechanical vibration may cause breakage of the tungsten filaments.

A free circulation of air must be provided to insure adequate cooling of the glass during operation.

The cooling water should be of sufficient purity to retard the tendency toward the formation of scale on the anode. Formation of scale would have the effect of insulating the anode from the water and the ineffective cooling of the anode would result in failure of the tube. It is therefore recommended that distilled water be used in the cooling system.

The temperature of the water and rate of flow should be such that there is no tendency for the water to boil, as indicated by a hissing sound, under maximum dissipation. In general, the outlet water temperature should not exceed 75° C. and the rate of flow should be not less than 7 gallons per minute. The minimum length of hose which can be used to insulate the plate from the water supply which is usually grounded will depend upon the resistivity of the water used and the leakage current that can be tolerated. This length should not be less than 15 feet. The hose connections must always be made so that the water flows in at the center port of the tube socket.

Provision should be made in the circuit to safeguard against the filament and plate voltages being applied until the cooling water is circulating at the proper rate and temperature, and for the immediate cut-off of the filament and plate voltages if the circulating rate falls below the allowed minimum or the temperature exceeds the allowable maximum. A momentary interruption of the water circulation during operation of the tube may cause immediate failure.

Electrical—Overload protection should always be provided for the plate circuit. A suitable fuse or circuit breaker should remove the plate voltage if the plate current exceeds 4 amperes. Although the tube is sufficiently rugged to withstand momentary overloads, a prolonged overload caused by inefficient adjustment of the circuit, may damage the tube. When adjusting a new circuit or installing a new tube, reduced plate voltage or a series resistance of 1000 to 5000 ohms in the plate circuit should be used until it is operating properly.

The filament should always be operated at the rated voltage, measured at the tube terminals. A 5% decrease in filament voltage reduces the thermionic emission approximately 35%. If satisfactory operation can be obtained at lower than the rated voltage an increase in filament life may be obtained. Either direct or alternating current may be used for heating the filament. If direct current is used, the plate and grid circuit returns should be connected to the positive filament terminal. The connections to the filament terminals should be reversed periodically. If alternating current is used, the circuit returns should also be connected to the center tap of the filament heating transformer winding or to the center tap of a resistor placed between the filament terminals. A resistance of 50 to 75 ohms of 250 watt rating is suitable.

Some provision should be made to limit the initial filament current, when the filament is cold. This may be done by inserting additional resistance in the filament circuit when voltage is first applied or by using a transformer having sufficiently high reactance.

Audio Amplifier or Modulator

Class B—Grid bias practically at cut-off and grid driving voltage higher than the bias.

Two tubes may be used in a balanced circuit. An adequate driving stage and an input transformer with good regulation must be used so that the grid current drawn during positive grid swings does not produce appreciable distortion. The output transformer must transform the load impedance to the proper value for the tubes used. The power output obtainable will be determined by the quality of the transformer used and the amount of distortion which can

be tolerated. The output can be increased or the distortion decreased by the use of degenerative feedback. The grid bias must be held constant and therefore cannot be obtained by grid leak or series resistor methods. A source having good regulation is necessary.

The power required of a modulator for complete modulation of a Class C amplifier is one-half the direct power input to the plates of the Class C amplifier.

Radio-Frequency Oscillator or Power Amplifier

Class B—Radio-Frequency Amplifier

The Class B radio-frequency amplifier is used to amplify a modulated radio-frequency carrier wave without appreciable distortion. It operates similarly to the Class B audio amplifier except that a single tube may be used, the tuned output circuit serving to preserve the wave shape. The push-pull circuit, however, eliminates the even order harmonics and thus increases the efficiency slightly.

Class C—Radio-Frequency Oscillator or Power Amplifier—Grid bias below cut-off.

Unmodulated

This type of operation is suitable for telegraphy, or the production of a continuous flow of radio-frequency power for purposes other than communication.

Plate Modulated

This type of operation is for use when the modulating voltage is superimposed on the plate supply voltage and to obtain good quality the output power should vary as the square of the plate voltage. For complete or 100% modulation, the plate voltage varies from zero to twice the applied direct value during a cycle of the audio frequency. With no modulation applied, the plate voltage is, of course, the direct value and the carrier power output is one-fourth of the peak power output under 100% modulation. In this case, since the plate voltage varies with modulation, the direct value must be rated lower than for other types of operation.

High Frequency Ratings

The frequency limits specified under maximum ratings are based on the tube being used as an oscillator. The tube may be used at full rating up to 3 megacycles. When operating at higher frequencies, the dielectric losses, charging currents and lead-in heating are increased greatly. The plate voltage and hence plate dissipation must be reduced to values specified for the upper frequency limit and for frequencies between these two limits the plate voltage should be proportionately reduced.

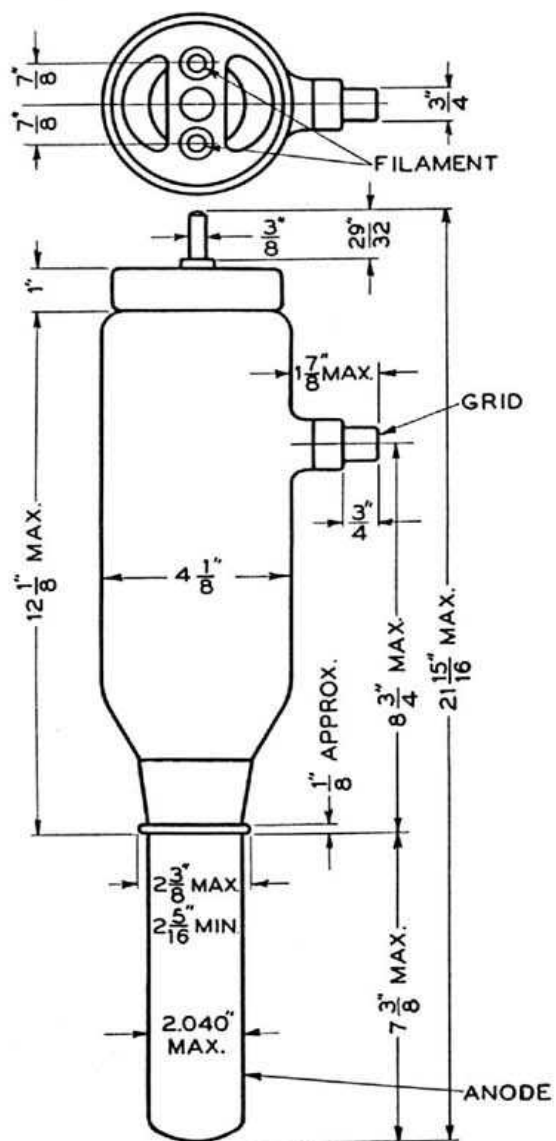


FIG. 1

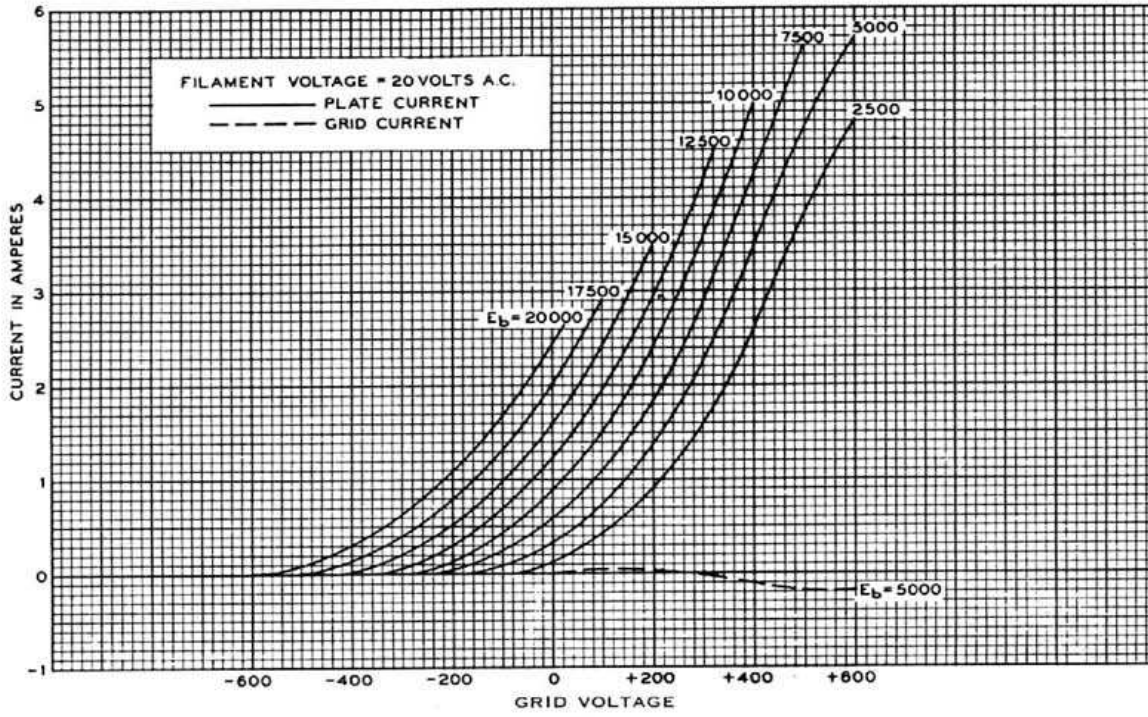


FIG. 2

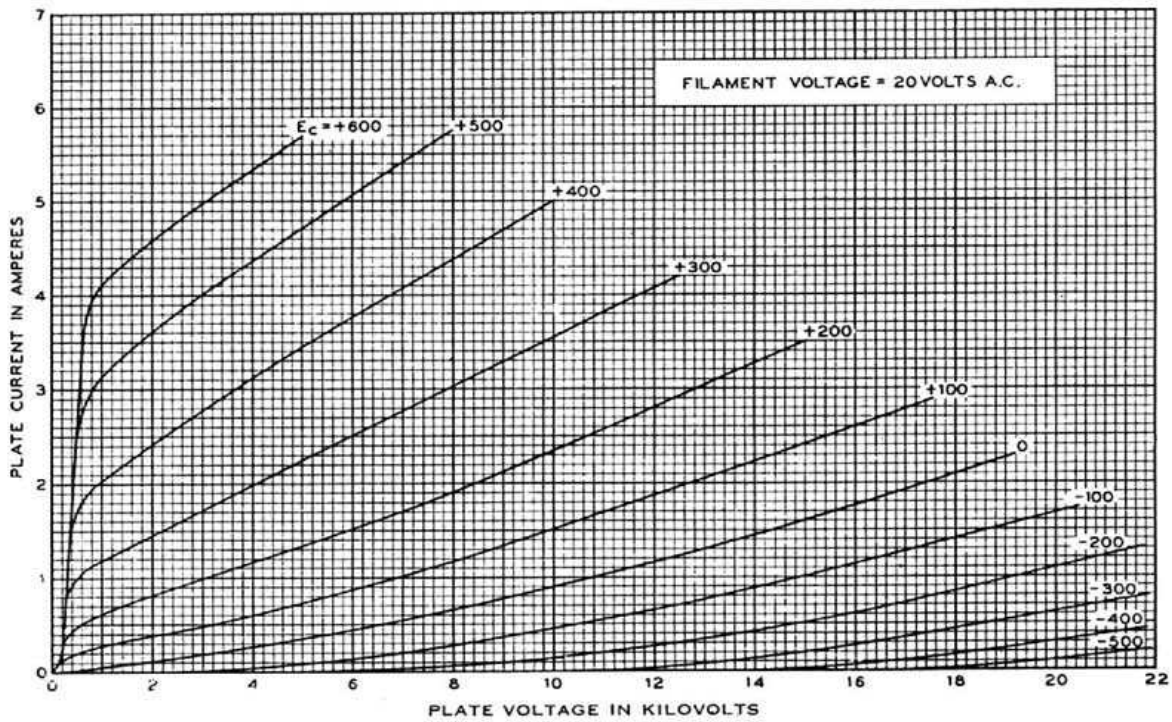


FIG. 3