

# *Western Electric*

## 343AA Vacuum Tube



### **Classification—Filamentary, Forced Air-Cooled Triode**

This tube may be used as an audio-frequency amplifier or as a radio-frequency oscillator, amplifier or modulator. This tube is similar to the 343A water-cooled tube, in electrical characteristics but is equipped with fins attached to the anode for forced air cooling.

### **Dimensions—**Dimensions and outline diagrams are shown in Figure 1 and are:

Maximum overall length. ....	21 $\frac{3}{16}$ "
Diameter of bulb. ....	4 $\frac{1}{8}$ "

**Mounting—**This vacuum tube should be mounted only in a vertical position with the filament terminals at the top in a Western Electric 154A or similar socket. The metal jacket of the socket encloses the anode fins so the forced air stream is restricted to the fins. The photograph above shows the tube mounted in the metal container of the socket.

**Filament—Tungsten**

Filament voltage.....	21.5 volts, a.c.
Nominal filament current.....	57.5 amperes
Average thermionic emission.....	8.0 amperes

**Average Direct Interelectrode Capacitances**

Plate to grid.....	23.5 $\mu\mu\text{f}$
Grid to filament.....	16.6 $\mu\mu\text{f}$
Plate to filament.....	1.9 $\mu\mu\text{f}$

**Characteristics**—Performance data given below are based upon a typical set of conditions. Variations can be expected with different circuits and tubes.

Figures 2 and 3 give the static characteristics of a typical tube plotted against grid and plate voltages. Figure 4 gives the constant grid- and plate-current curves. In Figure 5 the static grid current characteristics are shown. Figure 6 shows the filament resistance and emission characteristics.

**Average Characteristics** at plate voltage of 10,000 and plate current of 0.50 ampere.

Amplification factor.....	40
Plate resistance.....	5920 ohms
Grid to plate transconductance.....	6750 micromhos

**Operation****Maximum Ratings**

Max. direct plate voltage.....	18,000 volts
Max. direct plate current.....	1.5 amperes
Max. plate dissipation.....	5000 watts
Max. grid dissipation.....	200 watts
Max. r-f grid current.....	20 amperes
Max. frequency for the above ratings.....	4 megacycles
Max. plate voltage for upper frequency limit of 16 Mc.....	5000 volts
Max. plate voltage for frequencies between 4 and 16 Mc in proportion	

**Class A Audio Amplifier or Modulator**

Direct plate voltage.....	12,500 Max.	10,000 volts
Grid bias.....	-170	-130 volts
Direct plate current.....	0.40	0.30 ampere
Plate dissipation.....	5000 Max.	3000 watts
Load impedance.....	12,000	20,000 ohms
Undistorted output.....	650	400 watts

**Class B Audio Amplifier or Modulator** for Balanced 2 Tube Circuit

Direct plate voltage.....	12,500 Max.	10,000 volts
Grid bias.....	-200	-150 volts
Direct plate current per tube		
No drive.....	0.25	0.22 ampere
Max. drive.....	1.3	1.3 amperes
Plate dissipation per tube.....	5000 Max.	5000 watts

**Class B Radio-Frequency Amplifier**

Direct plate voltage . . . . .	15,000 Max.	12,500 volts
Direct plate current for carrier conditions . . . . .	0.70 Max.	0.70 ampere
Grid bias . . . . .	-350	-300 volts
Approx. carrier watts for use with 100% modulation . . . . .	3500	2900 watts

**Class C Radio-Frequency Oscillator or Power Amplifier—Unmodulated**

Direct plate voltage . . . . .	18,000 Max.	12,500 volts
Direct plate current . . . . .	1.25	1.25 amperes
Grid bias . . . . .	-600 to -800	-450 to -600 volts
Nominal power output . . . . .	15,000	10,000 watts
Plate dissipation . . . . .	10,000 Max.	5600 watts

**Class C Radio-Frequency Amplifier—Plate Modulated**

Direct plate voltage . . . . .	7500 Max.	5000 volts
Direct plate current . . . . .	1.0	1.0 ampere
Grid bias . . . . .	-400	-300 volts
Max. direct grid current . . . . .	150	150 milliamperes
Nominal carrier power output . . . . .	5000	3300 watts

**Operating Precautions**

**Mechanical**—Figure 1 shows the overall dimensions and basing arrangement for the tube.

The tubes should not be subjected to mechanical shock or excessive vibration. Mechanical vibration may cause breakage of the tungsten filaments. Care should always be used in handling the tube to avoid scratches, as these may develop in cracks which result in leaks.

A free circulation of air must be provided to insure adequate cooling of the glass during operation.

The cooling water should be of sufficient purity to retard the tendency toward the formation of scale on the anode. Formation of scale would have the effect of insulating the anode from the water and the ineffective cooling of the anode would result in failure of the tube. It is therefore recommended that distilled water be used in the cooling system.

The temperature of the water and rate of flow should be such that there is no tendency for the water to boil, as indicated by a hissing sound, under maximum dissipation. In general, the outlet water temperature should not exceed 75° C. and the rate of flow should be not less than 3 gallons per minute. The minimum length of hose which can be used to insulate the plate from the water supply which is usually grounded will depend upon the resistivity of the water used and the leakage current that can be tolerated. In no case must this be less than 15 feet. The hose connections must always be made so that the water flows in at the center port of the tube socket.

Provision should be made in the circuit to safeguard against the filament and plate voltages being applied until the cooling water is circulating at the proper rate and temperature, and for the immediate cut-off of the filament and plate voltages if the circulating rate falls below the allowed minimum or the temperature exceeds the allowable maximum. A momentary interruption of the water circulation during operation of the tube may cause immediate failure.

**Electrical**—Overload protection should always be provided for the plate circuit. A suitable fuse or circuit breaker should remove the plate voltage if the plate current exceeds 3 amperes. Although the tube is sufficiently rugged to withstand momentary overloads, a prolonged overload caused by inefficient adjustment of the circuit, may damage the tube. When adjusting a new circuit or installing a new tube, reduced plate voltage or a series resistance of 1000 to 5000 ohms in the plate circuit should be used until it is operating properly.

dissipation the temperature rises above 120° C. The forced air shall be supplied at the bottom so that the air is forced upward through the anode fins.

**Electrical**—Overload protection should always be provided for the plate circuit. A suitable fuse or circuit breaker should remove the plate voltage if the plate current exceeds 3 amperes. Although the tube is sufficiently rugged to withstand momentary overloads, a prolonged overload caused by inefficient adjustment of the circuit, may damage the tube. When adjusting a new circuit or installing a new tube, reduced plate voltage or a series resistance of 1000 to 5000 ohms in the plate circuit should be used until it is operating properly.

The filament should always be operated at the rated voltage, measured at the tube terminals. A 5% decrease in filament voltage reduces the thermionic emission approximately 35%. Either direct or alternating current may be used for heating the filament. If direct current is used, the plate and grid circuit returns should be connected to the positive filament terminal, and the connections to the filament terminals should be reversed periodically. If alternating current is used, the circuit returns should be connected to the center tap of the filament heating transformer winding or to the center tap of a resistor placed between the filament terminals. A resistance of 50 to 75 ohms of 100 watt rating is suitable.

Some provision should be made, when the filament is cold, to limit the initial surge current to a value of approximately 120 amperes. This may be done by inserting additional resistance in the filament circuit when voltage is first applied or by using a transformer having sufficiently high reactance. The cold resistance of the filament is approximately 0.035 ohm.

### Audio Amplifier or Modulator

**Class A**—Peak grid drive equal to or less than the grid bias.

Grid bias may be obtained from the drop across a resistance in the plate current return or from a battery or rectifier supply.

Plate dissipation allowable for this type of service is generally lower than is safe for other uses since the energy is dissipated in the plate in smaller areas due to relatively high voltage drop in the tube.

The plate dissipation is equal to the plate voltage multiplied by the normal plate current. Performance data are based upon the use of a resistance load. Undistorted output is calculated on the basis of 5% second harmonic distortion.

**Class B**—Grid bias practically at cut-off and grid driving voltage higher than the bias.

Two tubes may be used in a balanced circuit. An adequate driving stage and an input transformer with good regulation must be used so that the grid current drawn during positive grid swings does not produce appreciable distortion. The output transformer must transform the load impedance to the proper value. The power output obtainable will be determined by the quality of the transformer used and the amount of distortion which can be tolerated. The output can be increased or the distortion decreased by the use of degenerative feedback. The grid bias must be held constant and therefore cannot be obtained by grid leak or series resistor methods. A battery or other source having good regulation is necessary.

The power required of a modulator for complete modulation of a Class C amplifier is one-half the direct power input to the plates of the Class C amplifier.

### Radio-Frequency Oscillator or Power Amplifier

**Class B**—Radio-Frequency Amplifier—Grid bias practically at cut-off.

The Class B radio-frequency amplifier is used to amplify a modulated radio-frequency carrier wave without appreciable distortion. It operates similarly to the Class B audio am-

plifier except that only a single tube need be used, the tuned output circuit serving to preserve the wave shape. The push-pull circuit, however, eliminates the even order harmonics and thus increases the efficiency slightly.

**Class C—Radio-Frequency Oscillator or Power Amplifier—Grid bias below cut-off.**

**Unmodulated**


This type of operation is suitable for telegraphy, or the production of a continuous flow of radio-frequency power for purposes other than communication.

**Plate Modulated**

This type of operation is for use when the modulating voltage is superimposed on the plate supply voltage and to obtain good quality the output power should vary as the square of the plate voltage. For complete or 100% modulation, the plate voltage varies from zero to twice the applied direct value during a cycle of the audio frequency. With no modulation applied, the plate voltage, is of course, the direct value and the carrier power output is one-fourth of the peak power output under 100% modulation. In this case, since the plate voltage varies with modulation, the direct value must be rated lower than for other types of operation.

**High Frequency Ratings**

The frequency limits specified under maximum ratings are based on the tube being used as an oscillator. The tube may be used at full rating up to 4 megacycles. When operating at higher frequencies, the dielectric losses, charging currents and lead-in heating may be increased to an excessive degree. The plate voltage and hence plate input must be reduced gradually as the frequency is increased beyond 4 megacycles. Between 4 megacycles and the limit of 16 megacycles the maximum allowable plate voltage is reduced proportionately from 18,000 volts to 5,000 volts.

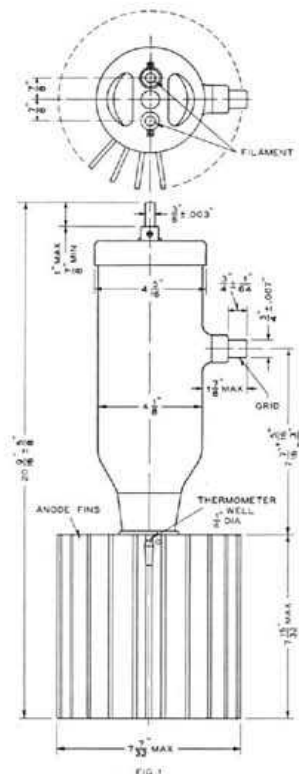

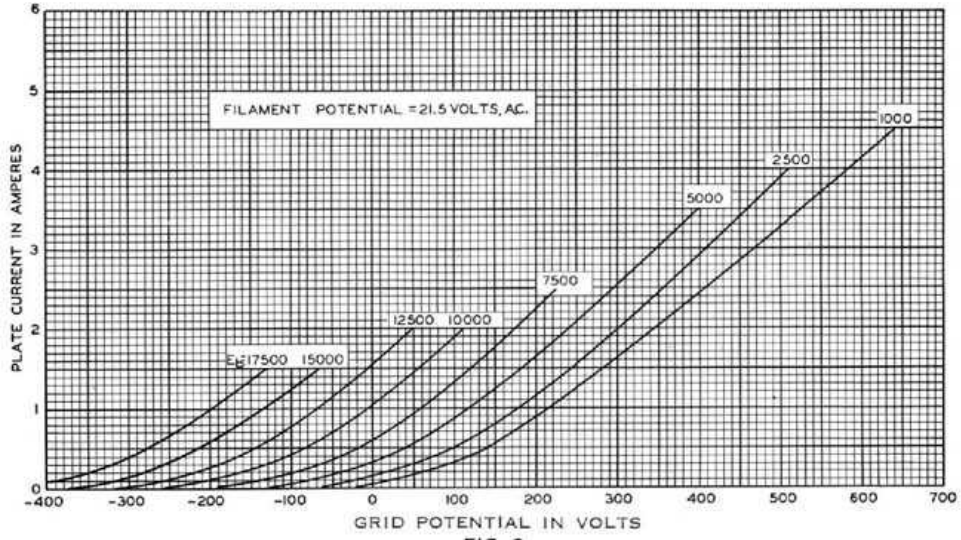


FIG. 2

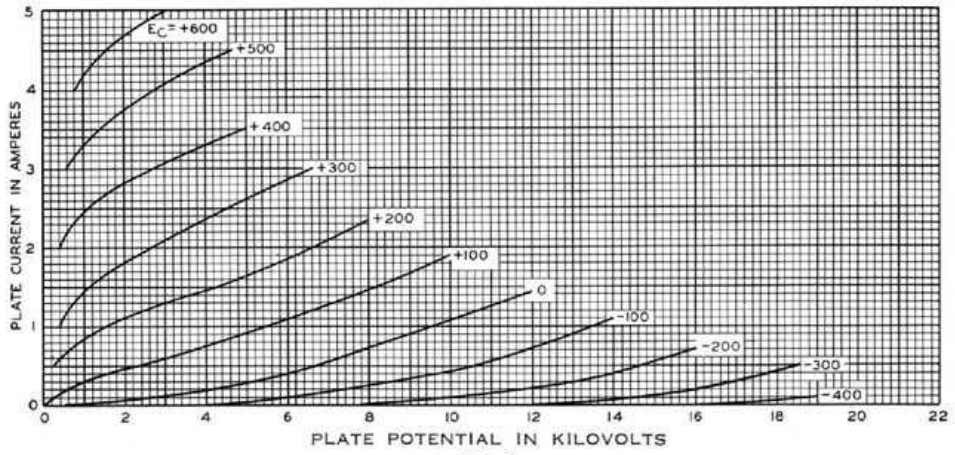


FIG. 3

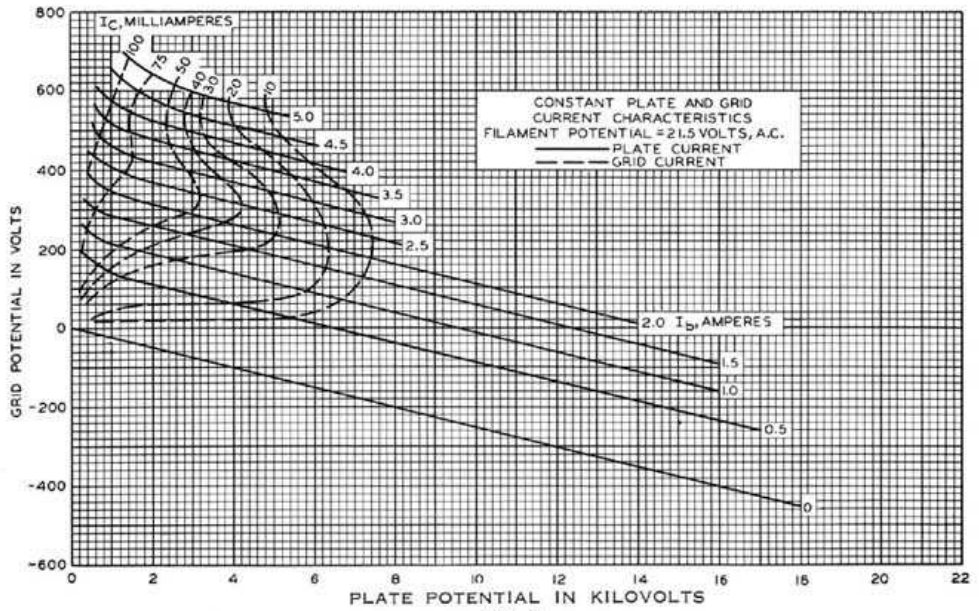


FIG. 4



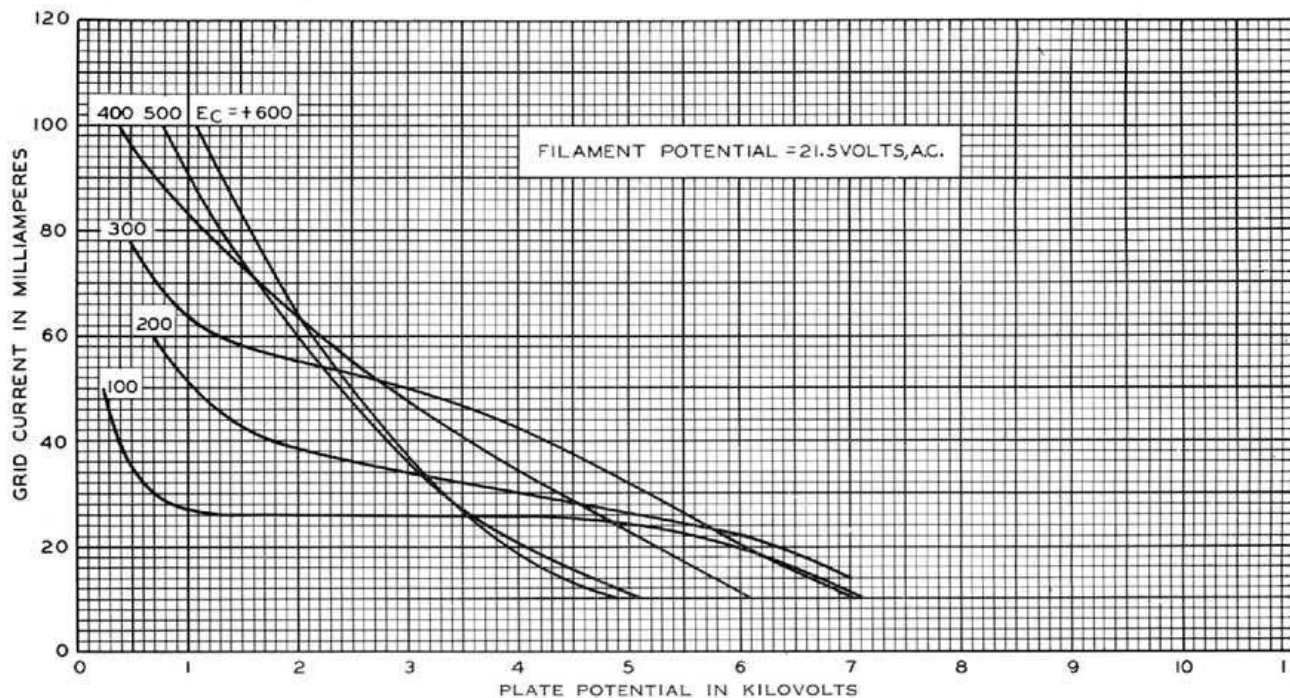


FIG. 5

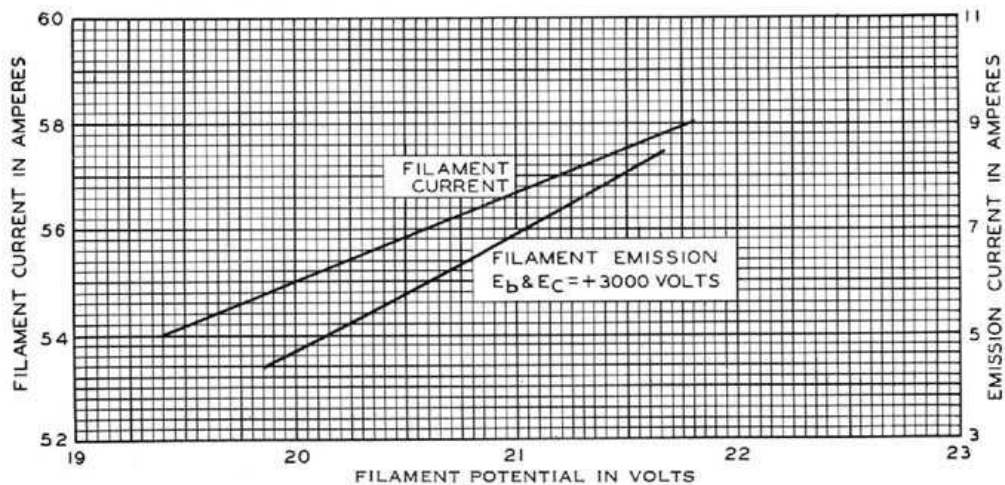


FIG. 6