

**TYPE CV-11**
**MODULATOR, A-F AND R-F POWER AMPLIFIER, OSCILLATOR
ENGINEERING INFORMATION**
GENERAL RATINGS

Number of Electrodes 3
 Filament Voltage 10 volts
 Current 2.5 amperes
 Type Thoriated Tungsten

Average Characteristic Values Calculated at:
 65 ma. Plate Current

Amplification Factor 14
 Plate Resistance 3500 ohms
 Mutual Conductance 4000 micromhos

Average Direct Interelectrode Capacities:

Grid to Plate 9.0 uuf
 Grid to Filament 5.0 uuf
 Plate to Filament 2.4 uuf

Maximum Overall Dimensions:

Length 6 1/2 inches
 Diameter 2 1/16 inches
 Bulb T-16
 Cap Medium Metal
 Base Jumbo 4-Large Pin
 Type of Cooling Air
 Net Weight 5 1/2 oz.

MAXIMUM RATINGS

Maximum D-C Plate Voltage Modulated 1250 volts
 Maximum D-C Plate Voltage Unmodulated 1500 volts
 Maximum D-C Plate Current Modulated 125 ma.
 Maximum D-C Plate Current Unmodulated 150 ma.
 Maximum Plate Dissipation 65 watts
 Maximum D-C Grid Current 25 ma.
 Maximum R-F Grid Current 6 amp.

Frequency Rating for Operating Conditions with Maximum
 Rated Power Input and Nominal Output:

Below 30 megacycles
 Above 10 meters

*Maximum Frequency Rating with Reduced Power Input
 and Output:

Below *85 megacycles
 Above *3.5 meters

*For operation at the higher frequencies, the plate voltage, and
 plate input should not exceed 50% of the Maximum Ratings and
 Typical Operating Conditions. The R-F grid current should never
 exceed the maximum rated value.

INSTALLATION

The base of the UNITED CV-11 is designed for mounting in a standard Jumbo 4-Large Pin, bayonet type socket. The tube may be mounted either vertically, or horizontally with the plane of the filament on edge. Ample air space should be provided for ventilation.

The filament of the CV-11 should be operated at the rated value of 10 volts. Operation at other than rated value may result in loss of filament emission and short life. Except in cases where freedom from hum is essential, the filament of the CV-11 should be operated from an a-c source.

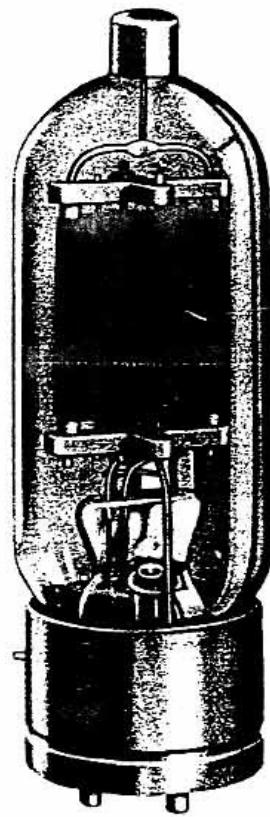
The plate dissipation of the CV-11 should never exceed the values given under Maximum Ratings and Typical Operation Conditions.

GRAPHITE ANODE

A specially processed graphite anode is used in this tube type because of several specific advantages over metals such as tantalum, molybdenum, and nickel. The radiating area of graphite is approximately twice the projected anode area because of its surface porosity and it will dissipate at least four times more heat than metal.

Graphite, being infusible will not warp or twist. The exact form of graphite is maintained under all temperatures; hence constant-inter-element relationships and uniform characteristics result. The inherent advantages of graphite over metal are of primary importance in designing tubes of this type for long and satisfactory service.

All ratings given are for continuous service. Higher ratings are permissible
 for intermittent operation. Additional data will be furnished upon request.

**UNITED TYPE CV-11**

This sturdy triode has a plate dissipation of 65 watts for class C telegraph and class B service. A pair of these tubes in class B audio service will deliver 215 watts output.

A-F POWER AMPLIFIER AND MODULATOR—CLASS B

Maximum D-C Plate Voltage 1500 volts
 Maximum D-C Plate Current | Averaged over any... 150 ma.
 Maximum Plate Dissipation | audio-freq. cycle.... 65 watts

Typical Operation (2 tubes):

Filament Voltage	10	10	10	a-c volts
D-C Plate Voltage	1000	1250	1500	volts
Grid Voltage	-70	-90	-110	volts
Zero-Sig. Plate Cur.	30	30	30	ma.
Max.-Sig. Plate Cur.	240	240	225	ma.
Load Res. (plate to plate)	8000	11200	14400	ohms
Power Output (2 tubes)	185	200	215	watts

**PLATE MODULATED R-F POWER AMPLIFIER
CLASS C TELEPHONY**

(Carrier Conditions—Modulation Factor = 1.0)

Maximum D-C Plate Voltage 1250 volts
 Maximum D-C Plate Current 150 ma.
 Maximum Plate Dissipation 30 watts
 Maximum R-F Grid Current 5 amp.
 Maximum D-C Grid Current 25 ma.
 Typical Operation:

Filament Voltage	10	10	a-c volts
D-C Plate Voltage	1000	1250	volts
Grid Voltage	-200	-250	volts
D-C Plate Current	120	130	ma.
D-C Grid Current†	7	6	ma.
Driving Power†	3	3	watts
Power Output	84	120	watts

R-F POWER AMPLIFIER—CLASS B TELEPHONY

(Carrier Conditions—Modulation Factor = 1.0)

Maximum D-C Plate Voltage 1500 volts
 Maximum D-C Plate Current 120 ma.
 Maximum Plate Dissipation 65 watts
 Maximum R-F Grid Current 6 amp.

Typical Operation:

Filament Voltage	10	10	10	a-c volts
D-C Plate Voltage	1000	1250	1500	volts
Grid Voltage	-70	-90	-110	volts
D-C Plate Current	95	80	65	ma.
Peak Power Output	120	128	128	watts
Nominal Carrier Power Output	30	32	32	watts

R-F POWER AMPLIFIER AND OSCILLATOR**CLASS C TELEGRAPHY**

(Key-down Conditions)

Maximum D-C Plate Voltage 1500 volts
 Maximum D-C Plate Current 150 ma.
 Maximum Plate Dissipation 65 watts
 Maximum R-F Grid Current 6 amp.
 Maximum D-C Grid Current 25 ma.

Typical Operation:

Filament Voltage	10	10	10	a-c volts
D-C Plate Voltage	1000	1250	1500	volts
Grid Voltage	-145	-180	-215	volts
D-C Plate Current	130	120	120	ma.
D-C Grid Current†	6	7	6	ma.
Driving Power†	3	3	3	watts
Power Output	90	115	140	watts

† Subject to wide variations depending on the impedance of the load circuit. The driver stage should have a tank circuit of good regulation and should be capable of delivering considerably more than the required driving power.

